


// ACID CHEMICALS & MULTIPURPOSE

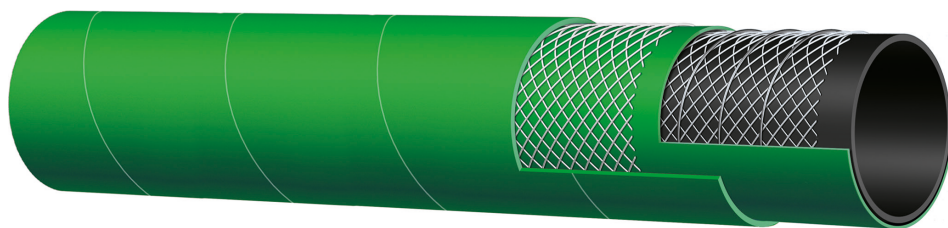

// 5090G

Acid-chemical S&D 16 bar (240 psi) - UPE FDA - EU 10/2011 A+B+C+D2

Tube: transparent UPE (Ultra High Molecular Weight Polyethylene).

Reinforcement: high tensile textile cords with embedded steel helix wire.

Cover: green EPDM - abrasion and ozone resistant.

Application: acid and chemical suction and delivery.

Suitable for 98% of existing chemicals.

Temperature: -30 °C +100 °C (-22 °F +212 °F) depending on conveyed chemical

ID (mm)	ID (in)	OD (mm)	OD (in)	WP (bar)	WP (psi)	BP (bar)	BP (psi)	BR (mm)	BR (in)	Vacuum %	Weight (kg/m)	Weight (lb/ft)
19,0	3/4"	31,0	1,22	16	240	48	720	114	4,49	90,00	0,580	0,39
25,0	1"	37,0	1,46	16	240	48	720	150	5,91	90,00	0,720	0,49
32,0	1 1/4"	44,0	1,73	16	240	48	720	192	7,56	90,00	0,880	0,60
38,0	1 1/2"	50,0	1,97	16	240	48	720	228	8,98	90,00	1,030	0,70
51,0	2"	63,0	2,48	16	240	48	720	306	12,05	90,00	1,360	0,92
63,0	2 1/2"	77,0	3,03	16	240	48	720	306	12,05	90,00	2,150	1,45
76,0	3"	92,0	3,62	16	240	48	720	456	17,95	80,00	2,840	1,91
102,0	4"	118,0	4,65	16	240	48	720	612	24,09	80,00	3,940	2,65

上海津峻流体科技有限公司 - AG授权分销商

TEL:+86-21-58400374/58400394

FAX:+86-21-50182690

E-mail:fengjunfluid@163.com

ADD:上海市奉贤区浦卫公路6655号一号厂房

<https://tiger-flex.com.cn/>